

INSTALLATION MANUAL

TRIUMPH

Tiger Explorer 1200

YEAR 2012-2016



H HYDRAULIC SPRING PRELOAD **R** REBOUND ADJUSTABLE **W** HIGH/LOW SPEED COMPRESSION ADJUSTABLE


MX456-375HRW-13-858

Disassemble



ENSURE BIKE IS ON STANDS AND SECURE BEFORE REMOVING SHOCK.

1

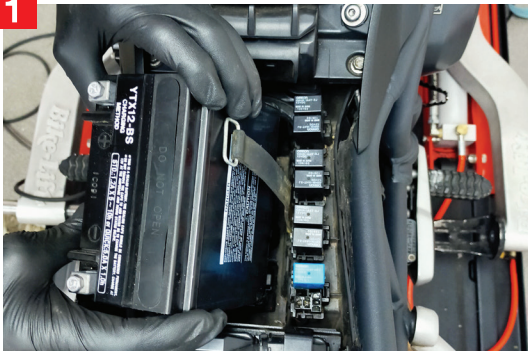

1. After remove the seat. Then take the battery out.

2




2. Unfast the reservoir clamp by Using Screw Driver.

3



3. Remove the top Bolt.

4

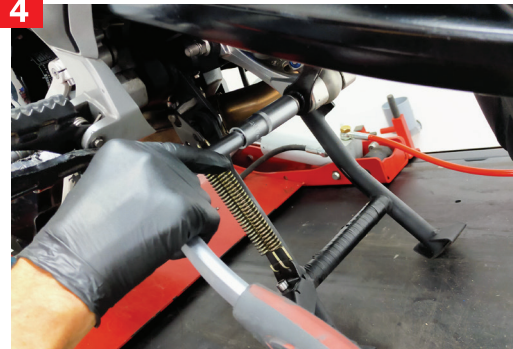

4. Remove the Bottom bolt.

INSTALLATION MANUAL

TRIUMPH

Tiger Explorer 1200

YEAR 2012-2016

Dissemble




6. Remove the Shock Absorber out.


Installation




1. Bring the YSS shock in place

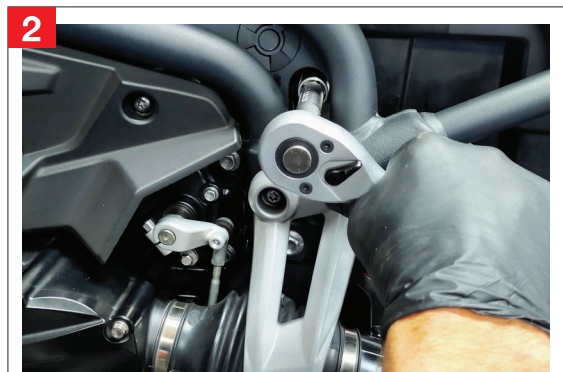

6. Assemble the original bolt top and bottom.

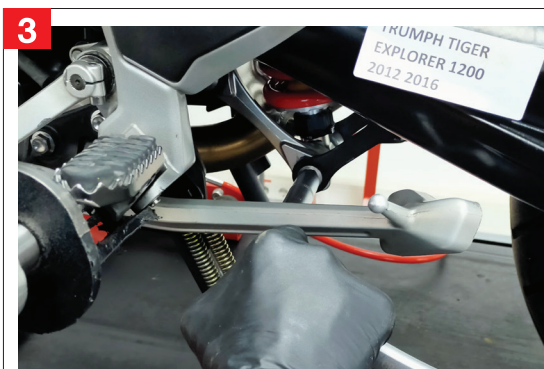

7. assemble the original bolt top and bottom

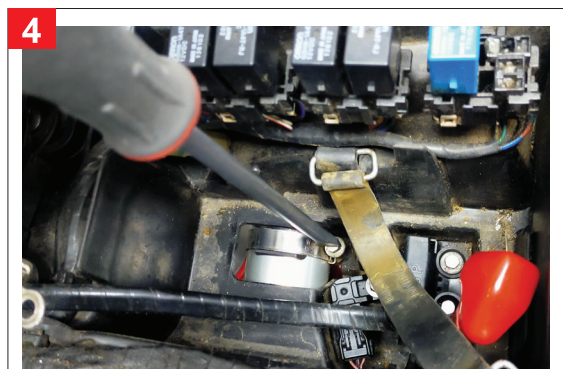

6. Assemble the reservoir at the original place, and tight the reservoir clamp and assemble the battery

INSTALLATION MANUAL

TRIUMPH

Tiger Explorer 1200

YEAR 2012-2016



How to Adjust



ADJUST HYDRAULIC SPRING PRELOAD

SPRING PRELOAD IS FOR ADJUSTING THE HEIGHT OF THE BIKE THE TECHNICIAN HAVE TO UNLOCK TREAD PRELOAD BY USING HEX WRENCHES 3 mm. AFTER THAT USE WRENCH TO LOOSEN OR TIGHTEN THE SPRING PRELOAD.



HOW TO ADJUST REBOUND

REBOUND IS TO CONTROL THE FAST / SLOW MOVEMENT. THE TECHNICIAN CAN ADJUST THE REBOUND KNOB.

S (SOFT) = IF REQUIRE FAST MOVEMENT.

H (HARD) = IF REQUIRE SLOW MOVEMENT.



ADJUST HI-LOW SPEED COMPRESSION

COMPRESSION IS TO CONTROL FAST / SLOW OF INGOING MOTION OF SHOCK ABSORBER FAST OR SLOW. ABLE TO ADJUST FOR 30 CLICKS. TO ADJUST, USING FLAT BLADE SCREWDRIVER TO AJUST.